



## μWire AeroBar<sup>®</sup>

### MODEL 5711

Simco-Ion's μWire ("Microwire") AeroBar Model 5711 is a cost-effective, high-performance ionizer specifically designed to eliminate static charge on large surface areas. Similar to the μWire AeroBar 5710, the 5711 is particularly suited for sensitive flat panels where fast discharge times and low swing voltages are desired. The shorter bar length of the 5711 is ideal for space constrained tools in both the flat panel and backend semiconductor processes. The μWire AeroBar utilizes MicroPulse technology applied to a corona wire system for optimal performance. MicroPulse technology reduces ion recombination at the corona wire, thus increasing product efficiency and performance.

The μWire Bar is optimized for lower gas consumption through its unique corona wire design. Corona wire produces more ions than emitter points, thus less gas is needed to effectively ionize the target area. The corona wire design also permits the bar to be placed closer to substrates, diminishing the recombination of ions and the resulting "striping effect".

The 5711 includes all the latest design features of the μWire AeroBar to make the bar easier to clean and provide higher performance. Shields have been added to protect the corona wire contacts during the cleaning process, making it truly a "one swipe to clean" bar.

#### Features


- Compact Size (150 or 250 mm length)
- Unique corona wire design (no emitter points)
- Micropulse high voltage technology
- Remotely mounted controller for 5711 AeroBar

#### Benefits

- Charge protection for even the most space-limited automation tools
- Bar mounted close to target without ionization "striping"; one swipe cleaning with bar in place
- Long-term balance stability and discharge time performance
- Uniform balance over the length of the bar
- Innovative ionization generation that translates to lower total cost of ownership
- Convenient access to power input, status lights and remote alarm connection



## Specifications

<b>Input Voltage</b>	24 VDC $\pm$ 10%, 12W (max)
<b>Output Voltage</b>	Adjustable, 13 kV pk-pk (typ)
<b>Range</b>	Target ionization 50-2000 mm, application and performance specification dependent
<b>Frequency</b>	Factory default setting is 1 Hz, adjustable from 0.1-35 Hz
<b>Balance</b>	< $\pm$ 25W over the length of the bar; maintains balance performance >6 months without cleaning (in an ISO 14644-1 Class 4 or better environment)
<b>Ion Emission</b>	Micropulsed high voltage technology
<b>Performance</b>	3.5 sec decay average @ 600 mm (typ) measured at 5711 AeroBar center and 25 mm straight air jet spacing, 18 l/m purging air, (250 mm long AeroBar), no laminar flow; setting 1 Hz, 100% output, CPM: balance < $\pm$ 10V; swing 100V pk-pk
<b>Corona Wire</b>	Tungsten, 80 micron dia.
<b>Gas Supply</b>	Clean dry air (CDA)
<b>Airflow</b>	150 mm AeroBar = 10 LPM, overall per bar 250 mm AeroBar = 18 LPM, overall per bar (Recommended flow is 2 LPM per jet orifice)
<b>Alarm Output</b>	Relay contact, rated $\pm$ 24 VDC @ 0.2A max
<b>Cleanroom Class</b>	ISO 14644-1 Class 2 (better than Fed. Std. 209E Class 1)
<b>Operating Env.</b>	Temperature 15-35°C (59-95°F); humidity 30-60% RH, non-condensing
<b>Ozone</b>	<0.05 ppm
<b>EMI</b>	Below background level
<b>Bar Settings</b>	All operating parameters set via a Handheld Terminal (HHT) by either wired connection or by battery powered IR control to the 5711-CTRL Controller
<b>LED Indicators</b>	Green POWER; Yellow COMMUNICATION; Red ALARM (combinations of LEDs indicate specific status conditions of the bar)
<b>Enclosure</b>	5711 AeroBar: ABS chassis; Stainless steel reference plates 5711-CTRL Controller: Stainless steel chassis
<b>Dimensions</b>	5711 AeroBar Ionizer: 3.0H x 1.3W x 6.3 or 10.2L in (76H x 34W x 160 or 260L mm) 5711-CTRL: 4.7H x 1.9W x 3.2D in (119H x 48W x 83D mm)
<b>Warranty</b>	Two year warranty
<b>Certifications</b>	

## Ordering Information


91-5711-150-25-01	$\mu$ Wire AeroBar Model 5711 with 25 mm straight air jet spacing, 150 mm length
91-5711-250-25-01	$\mu$ Wire AeroBar Model 5711 with 25 mm straight air jet spacing, 250 mm length
92-5711-150-01	$\mu$ Wire AeroBar Model 5711 kit includes Model 5711 bar (150 mm), 5711-CTRL controller, 25-0541-3M cable and AC to DC power adapter 14-21327
92-5711-250-01	$\mu$ Wire AeroBar Model 5711 kit includes Model 5711 bar (250 mm), 5711-CTRL controller, 25-0541-3M cable and AC to DC power adapter 14-21327
91-5711-CTRL-01	$\mu$ Wire AeroBar Model 5711 controller (supports one Model 5711 bar)
25-0541-3M	CAT-5e bar to controller RJ45 shielded interconnect cable, (3m)
14-21327	100-240 VAC to 24 VDC power adapter for 5711-CTRL controller

See  $\mu$ Wire AeroBar Model 5711 Accessory datasheet for information on  $\mu$ Wire AeroBar Model 5711 accessory products.

## Application Flexibility

The  $\mu$ Wire AeroBar can be operated with the factory default settings in “plug-and-play” mode, or optimized for a specific application using the Handheld Terminal. The bar’s ability to perform well in either a vertical or horizontal position along with the  $\mu$ Wire AeroBar low profile height and length design makes it easy to install in a variety of flat-panel tool locations (mail-slot, conveyor and load/unload cassette areas as well as within many backend semiconductor assembly and test areas

## Discharge Time Performance (Typical)

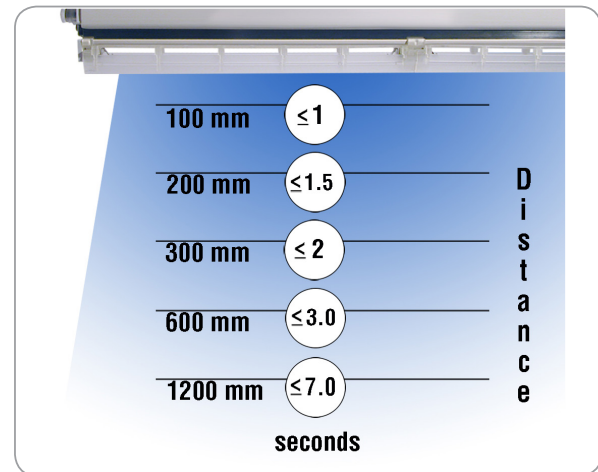

$\mu$ Wire AeroBar Model 5711 (250 mm length) with 25 mm Air Jet Spacing. Measured using Simco-Ion CPM Model 280A with CDA flow at 2 l/m per air jet (18 l/m total) and no HEPA flow.

## 5711-CTRL Controller

The  $\mu$ Wire AeroBar 5711 features a controller that can be placed in a convenient location for easy access to power input (local 24 VDC or power adapter from AC wall power), ionization status lights, handheld terminal setup connection and remote status connection.

**SIMCO ION**™  
An ITW Company

DS-5711\_V1 - 6/16  
© 2016 Simco-Ion  
All rights reserved.

**Simco-Ion**

Technology Group  
1601 Harbor Bay Pkwy, Ste 150  
Alameda, CA 94502

Tel: +1 (800) 367-2452 (in USA)  
Tel: +1 (510) 217-0600

ioninfo@simco-ion.com  
www.simco-ion.com