


DC MOTOR □60

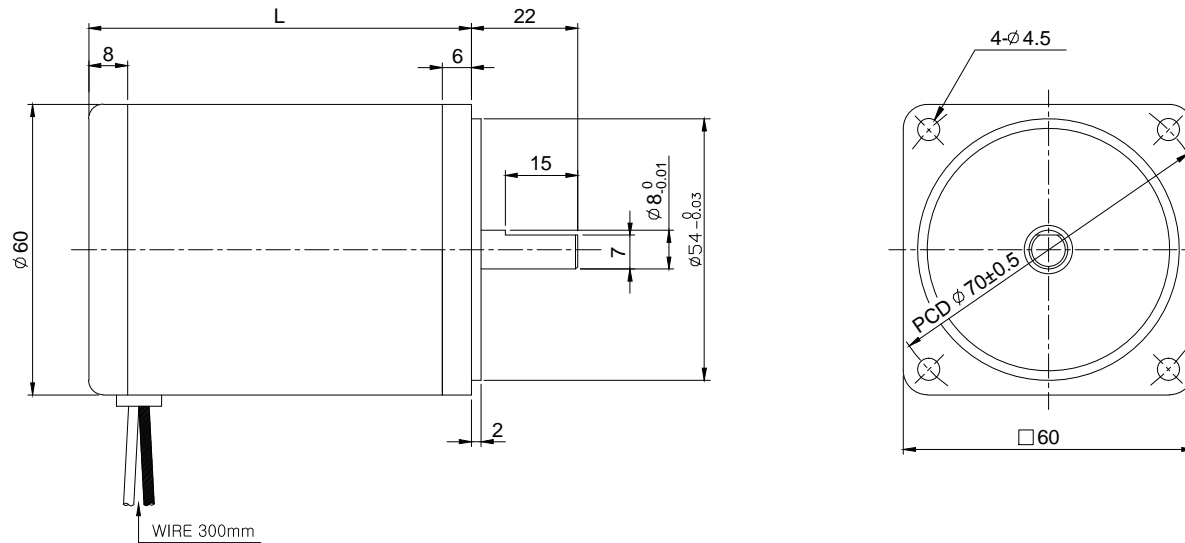

Specifications

| MODEL | Rated | | | | | | Weight (kg) | Length L (mm) |
|--------------|----------------|---------------|----------------|----------------|----------|-------|----------------|---------------------|
| | Voltage (V) | Output (W) | Current (A) | Speed (RPM) | Torque | | | |
| | | | | | (kgf-cm) | (N-m) | | |
| DD60-F012015 | 12 | 15 | 1.8 | 3000 | 0.5 | 0.05 | 0.8 | 89 |
| DD60-F012030 | 12 | 30 | 3.5 | 3000 | 1.0 | 0.10 | 1.2 | 109 |
| DD60-F024015 | 24 | 15 | 0.9 | 3000 | 0.5 | 0.05 | 0.7 | 79 |
| DD60-F024030 | 24 | 30 | 1.8 | 3000 | 1.0 | 0.10 | 1.0 | 99 |
| DD60-F024050 | 24 | 50 | 3.0 | 3000 | 1.6 | 0.16 | 1.2 | 109 |
| DD60-F090015 | 90 | 15 | 0.2 | 3000 | 0.5 | 0.05 | 0.7 | 79 |
| DD60-F090030 | 90 | 30 | 0.5 | 3000 | 1.0 | 0.10 | 0.8 | 89 |
| DD60-F090050 | 90 | 50 | 0.8 | 3000 | 1.9 | 0.19 | 1.2 | 109 |
| DD60-F180015 | 180 | 15 | 0.1 | 3000 | 0.5 | 0.05 | 0.8 | 89 |
| DD60-F180030 | 180 | 30 | 0.2 | 3000 | 1.0 | 0.10 | 1.0 | 99 |
| DD60-F180050 | 180 | 50 | 0.4 | 3000 | 1.6 | 0.16 | 1.2 | 109 |

* ENCODER / BRAKE 장착가능 (사전협의후 구매)